



Product structure diagram

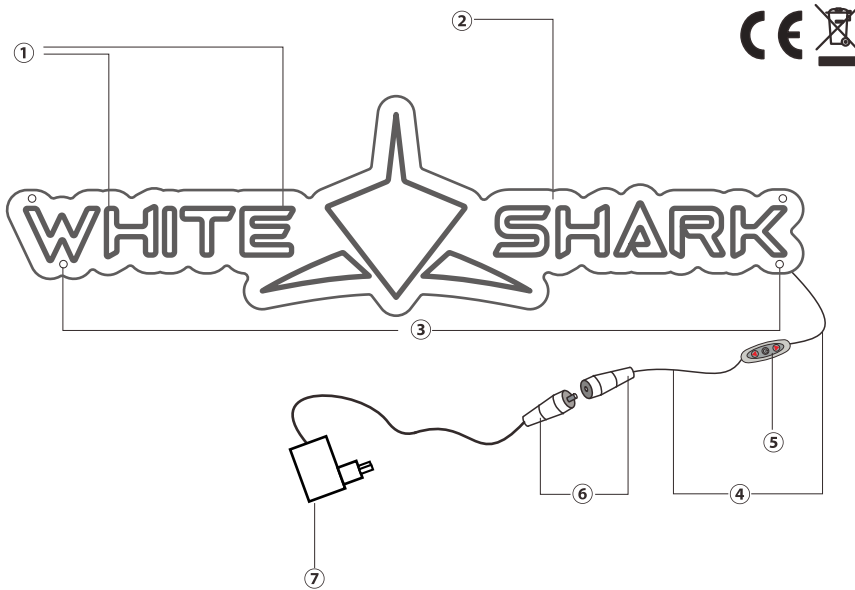


- ① Led neon flex
- ② Back board
- ③ Mounting holes
- ④ Power cable
- ⑤ Dimmer
- ⑥ DC connectors(5521)
- ⑦ AC Plug
- ⑧ Fixing screws (D4mm)
- ⑨ Wall plugs


Accessories kit



Tools required (not included)

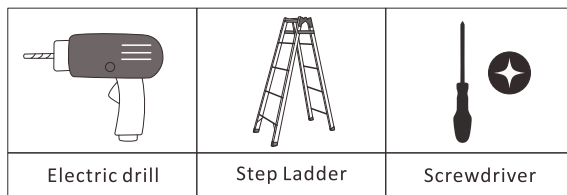

Customized fixing screws

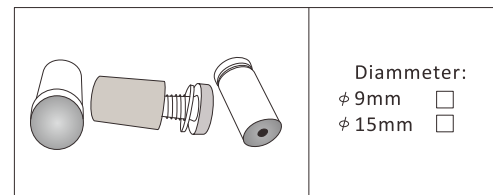

Connection and powering steps

- 1 Connect DC connectors from Neon sign to adapter.
- 2 Power the Adapter

SAFETY INFORMATION

Please read and understand this instruction before installation.


CAUTION

- 1 Shut off AC power switch before installation
- 2 The working voltage is DC12V, do not use wrong adapter with higher or lower output voltage. Wrong adapter will injure the product
- 3 Do not peel off neon tubes from acrylic back board
- 4 Do not disassemble the product
- 5 Adapter and DC connectors are not waterproof. Do not put them outside.
- 6 Do not put the product close to fire or heat sources, which can damage the product.
- 7 Because of AC to DC transformation, product will have a delay 2-3 seconds to work.
- 8 Once adapter is powered, the pilot lamp will be on. If the pilot lamp is off or flashing, please check AC plug and making sure the plug is not loose. If the problem persists, the adapter may be broken and a new one needs to be replaced.
- 9 Do not put the product under water.
- 10 If the sign does not work after power on. please check the connection of DC connectors and make sure the connection is not loose. If the problem persists, do not disassemble the product. Please contact retailer or distributor to get after selling service.

Upute


(DC12V)

Dijagram proizvoda

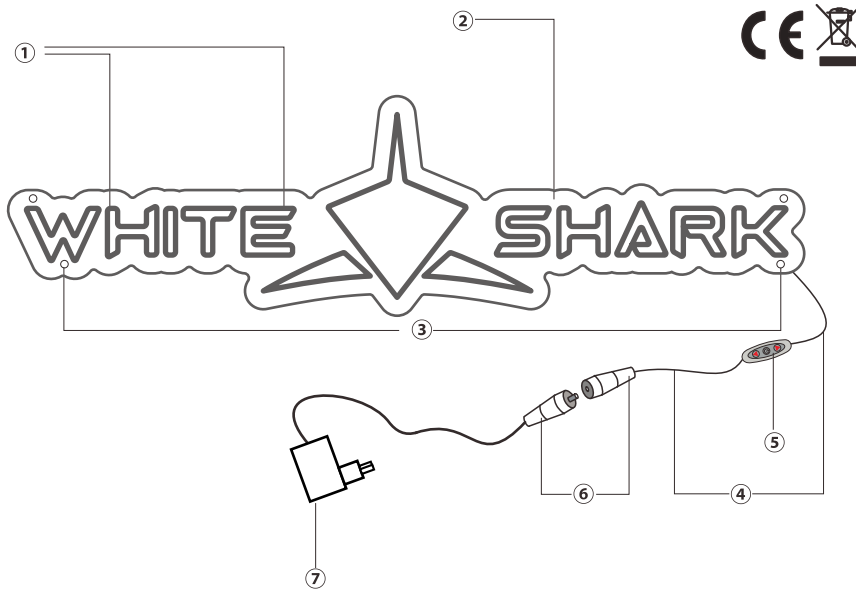


- ① LED neonska cijev
- ② Stražnja ploča
- ③ Montažne rupe
- ④ Kabel za napajanje
- ⑤ Regulator svjetline (dimmer)
- ⑥ DC konektori (5521)
- ⑦ AC utikač
- ⑧ Vijci za učvršćivanje (D4mm)
- ⑨ Tiplovi


Dodaci (uključeni):



Potrebni alati (nisu uključeni):

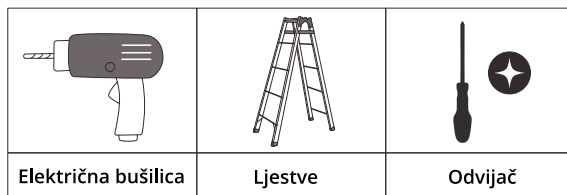

Vijci za fiskiranje

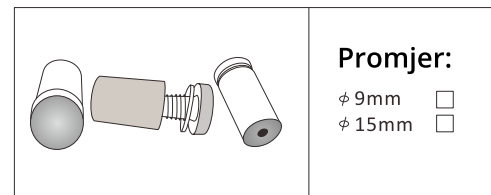

Koraci povezivanja i napajanja

1. Spojite DC konektore s natpisom na adapter.
2. Uključite adapter u struju.

SIGURNOSNE INFORMACIJE

Molimo pročitajte s razumjevanjem ove upute prije instalacije.

UPOZORENJA

1. Isključite AC napajanje prije instalacije.
2. Radni napon je DC12V. Ne koristite pogrešan adapter (s višim ili nižim naponom). Pogrešan adapter može oštetiti proizvod.
3. Nemojte guliti neonske cijevi s akrilne stražnje ploče.
4. Ne rastavljajte proizvod.
5. Adapter i DC konektori nisu vodootporni. Nemojte ih koristiti vani.
6. Ne postavljajte proizvod blizu vatre ili izvora topline — može se oštetiti.
7. Zbog pretvorbe AC u DC, proizvod može kasniti 2–3 sekunde s radom.
8. Kad je adapter spojen, lampica indikatora će svijetliti. Ako lampica ne svijetli ili treperi, provjerite AC utikač i konektore. Ako problem ostane, adapter je možda neispravan i treba ga zamijeniti.
- 9 Ne stavljajte proizvod u vodu.
10. Ako se znak ne uključi, provjerite DC konektore da nisu labavi. Ako problem ostane, ne rastavljajte proizvod, već kontaktirajte trgovca ili distributera.